

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

**0 387 966
A1**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 90200601.4

(51) Int. Cl.⁵: **F16L 3/123**

(22) Date of filing: 13.03.90

(30) Priority: 14.03.89 NL 8900620

(43) Date of publication of application:
19.09.90 Bulletin 90/38

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI NL

(71) Applicant: J. van Walraven B.V.
Industrieweg 5
NL-3641 RK Mijdrecht(NL)


(72) Inventor: van Walraven, Jan
Prins Bernhardlaan 6
NL-3641 GP Mijdrecht(NL)

(74) Representative: Boelsma, Gerben Harm, Ir. et
al
Octrooibureau Polak & Charlouis Laan
Copes van Cattenburch 80
NL-2585 GD Den Haag(NL)

(54) Pipe-clip.

(57) A pipe-clip, comprising an annular clip body (1) formed of a strip material, the ends of which are bent into flanges (2,3) adapted to be pulled together by means of a clamping screw (4), a lining (5) of elastomer material being provided on the inner side of the clip body (1), said lining (5) being provided

with ribs (7,8) or similar projections on one side and being smooth on the other side. According to the invention the projecting ribs (7,8) are provided on the outer circumference of the lining so as to engage the inner side of the annular clip body (1).

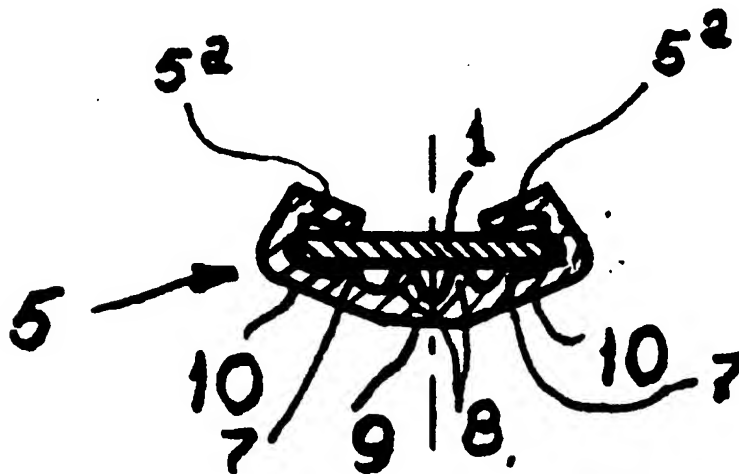

EP 0 387 966 A1

FIG 2

Pipe-clip.

The invention relates to a pipe-clip, comprising an annular clip body formed of a strip material, the ends of which are bent into flanges adapted to be pulled together by means of a clamping screw, a lining of elastomer material being provided on the inner side of the clip body, said lining being provided with ribs or similar projections on one side and being smooth on the other side.

Such a pipe-clip is known e.g. from DE 34 39 418. With this well-known pipe-clip the ribs or projections are provided on the inner circumferential side of the lining, i.e. on the side turned away from the annular clip body (the latter being usually formed of metal). When applying the clip around an article, such as a pipe, to be suspended by means of the clip, the projecting ribs will engage the outer surface of the article (pipe). Due to the projecting ribs a shock-absorbing suspension of the article (pipe) may be obtained.

In addition to being used for the suspension of metal pipes, such pipe clips are increasingly used for fastening plastic water pipes onto walls.

A disadvantage found in practice is to be seen in that after some time the lining tends to become adhesively connected with the plastic conduit. Due to this the plastic pipe will be no longer permitted to slide within the surrounding clip on locations, where this would be desirable. It is assumed that this undesired phenomenon is caused by migration of the plasticizer(s) within the elastomer material of the lining. The invention aims at reducing this tendency of the lining and the pipe to become adhesively connected, in such a way, that a sliding movement of the pipe at locations, where necessary, will remain possible while maintaining the shock absorbing effect of the lining.

According to the invention this aim is achieved in that the projecting ribs are provided on the outer circumference of the lining so that they engage the inner side of the annular clip body. This means, that the smooth side of the lining will get into contact with the pipe, due to which the surface pressure between lining and pipe will be a fraction only of that with the well-known construction.

It will remain possible with the pipe-clip according to this invention to clamp a pipe on a certain preferred location - from where sliding movements are permitted to take place in opposite directions-in place by tightening the clamping screw to such an extent, that the two flanges are engaging one another. At other locations a suspension permitting sliding movements may be obtained by means of the same size of pipe-clip when a filling member of a certain thickness is applied between the two flanges.

The invention will be hereinafter further explained by way of example, with reference to the accompanying drawing.

Fig. 1 is an elevation of the pipe-clip according to the invention and

fig. 2 is a cross-section along the line 2-2 in fig. 1.

The pipe-clip shown in the drawing consists of a strip of metal which is formed into an annular clip body 1, the ends of which are formed into flanges 2 and 3, which may be pulled together by means of a clamping screw 4, so as to clamp the clip body around an article, such as a plastic pipe.

The annular clip body 1 is provided with a lining 5 formed of an elastomer material, e.g. a suitable type of synthetic rubber. The lining is provided, in a manner known per se, with bent edges 5a facing one towards the other and adapted to engage the lateral edges of the annular clip body 1. The lining 5 has on its outer surface, i.e. on the side facing towards the annular clip body 1, projecting circumferential ribs 7 and 8. The ribs 7 located adjacent the lateral edges of the lining have a smaller height than the ribs 8 located in the central area. Due to this the lining has an inner circumferential surface which is composed of a smooth, cylindrically shaped middle section 9 and two conically widening lateral portions 10 connected to each of the ends of the section 9. Such a lining permits a pipe to be clamped in place by tightening the fastening screw to such an extent, that the two flanges 2 and 3 will engage each other, while the inner circumferential surface of the lining will substantially adapt a cylindrical shape. By turning the fastening screw less tightly, the lateral portions 10 will keep the conically widening shape so that a sliding movement of the pipe within the shorter middle section 10 will remain possible. In order to prevent the fastening screw 4 from being tightened too heavily at those locations, where a sliding movement must remain possible, a filling ring 13 may be applied between the two flanges 2 and 3.

A nut 14 is welded to the clip body 1 in the usual manner so as to attach the clip to a wall. The lining is provided with a corresponding recess.

Claims

1. A pipe-clip, comprising an annular clip body formed of strip material, the ends of which are bent into flanges adapted to be pulled together by means of a clamping screw, a lining of elastomer material being provided on the inner side of the

clip body, said lining being provided with ribs or similar projections on one side and being smooth on the other side, characterized in that the projecting ribs are provided on the outer circumference of the lining so that they engage the inner side of the annular clip body.

2. A pipe-clip according to claim 1, characterized in that the lining is provided with circumferential ribs, located adjacent the side edges and in the central area, the ribs located adjacent the lateral edges having a smaller height than the ribs located in the central area, so that the lining has an inner circumferential surface, which is composed of a smooth, cylindrically shaped middle portion and two conically widening side portions connected thereto on each side.

5

10

15

20

25

30



35

40

45

50

55

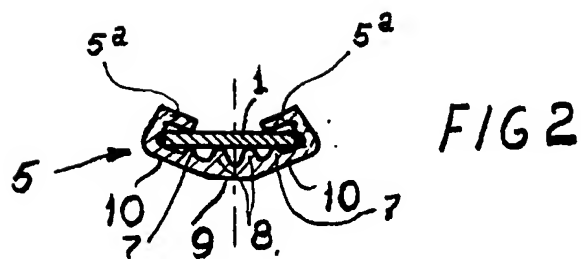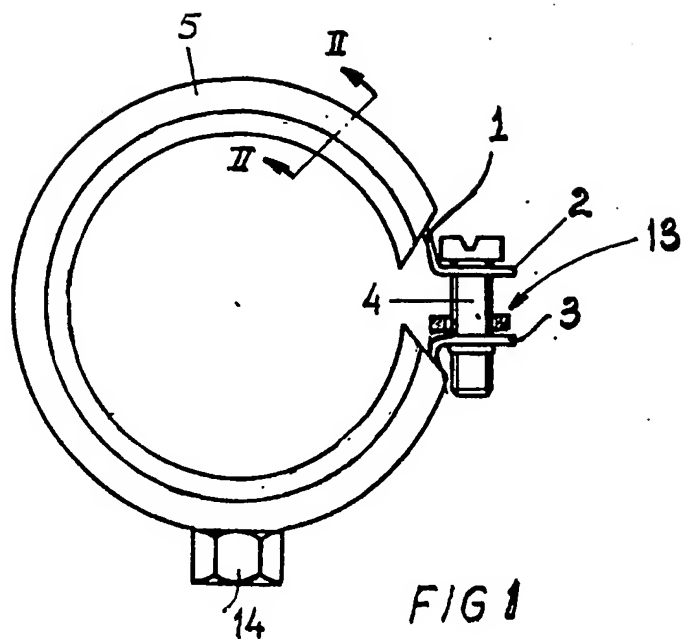



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 90 20 0601

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
A	US-A-2 338 145 (WEBB) * Fig. *	1	F 16 L 3/123
A	GB-A- 718 527 (CLAYTON-WRIGHT) * Fig. *	1	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			F 16 L
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 07-06-1990	Examiner HUBEAU M. G.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P0401)